



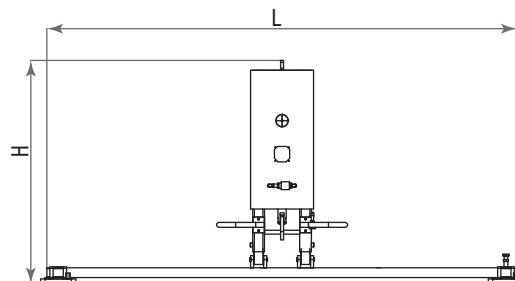

VENTOSA CON RIBALTAMENTO PNEUMATICO per pannelli nobilitati

VACUUM LIFTER

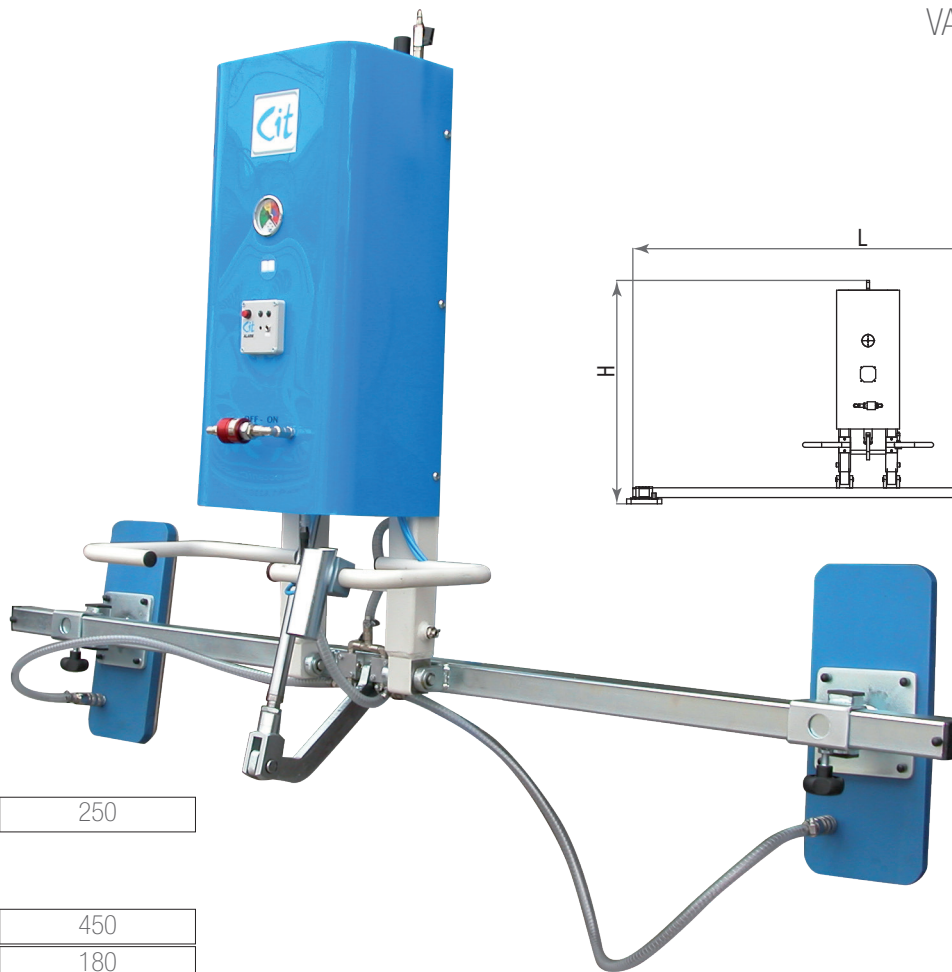


Tipo/Type **CMV W RP1**

Portata (kg)/Capacity	250
-----------------------	-----

Misure (mm)/Size

Piastre/Suction cups	A	450
	B	180

Dimensioni/Dimension	L	2406
(min/max)	H	1145
	C min/max	1270/2470

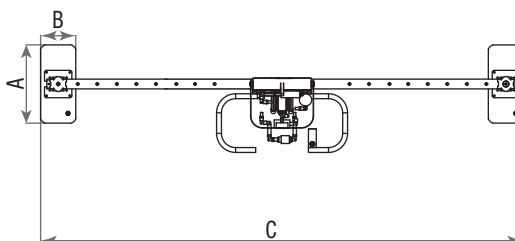

CMV W RP2

Funzionamento con pompa del vuoto ad aria compressa
 Struttura portante con basculamento pneumatico 0/90°
 Piastre aspiranti in nylon escludibili
 Guarnizioni idonee per superfici lisce o ruvide/irregolari
 Guarnizioni sostituibili rapidamente
 Regolazione della posizione delle piastre aspiranti
 Vuotometro di controllo
 Valvola a corsoio con sicurezza
 Serbatoio di prevuoto integrato nella struttura
 Sistema di allarme acustico

CMV W RP2

Working with compressed air pump
 Metal structure, with pneumatic tilting from 0/90°
 Excludible suction plates in nylon, easy remove seals
 Gaskets for smooth or rough / uneven surfaces
 Easily replaceable gaskets
 Bhot direction adjustable suction plates
 Vacuum gauge for check control
 Sliding valve with safety device
 Pre vacuum tank embodied in the metal structure
 Acoustic alarm system